

SMART Food Service Cart

ELP-900MH

Thermal-Separation-Type (Manual)



Main Features


Smart Design | Thermal Separation Temperature Control System | Double-Door Pass Type Separator

Model : ELP-900MH




SMART Food Service Cart for Optimal Temperature Patient Meal Distribution and Hygiene Management

- Maintains excellent heating function by minimizing air exchange with the sealed profile structure of the heat separator
- Shortens waiting time during meal preparation with 30 minute pre-heating to reach 65 °C
- Double-door pass type separator for increased food-service efficiency even in small spaces
- 6 casters minimize the rotation radius for convenient operation in narrow spaces
- Additional foot brakes make it easy to keep the food-service car secure when stopped

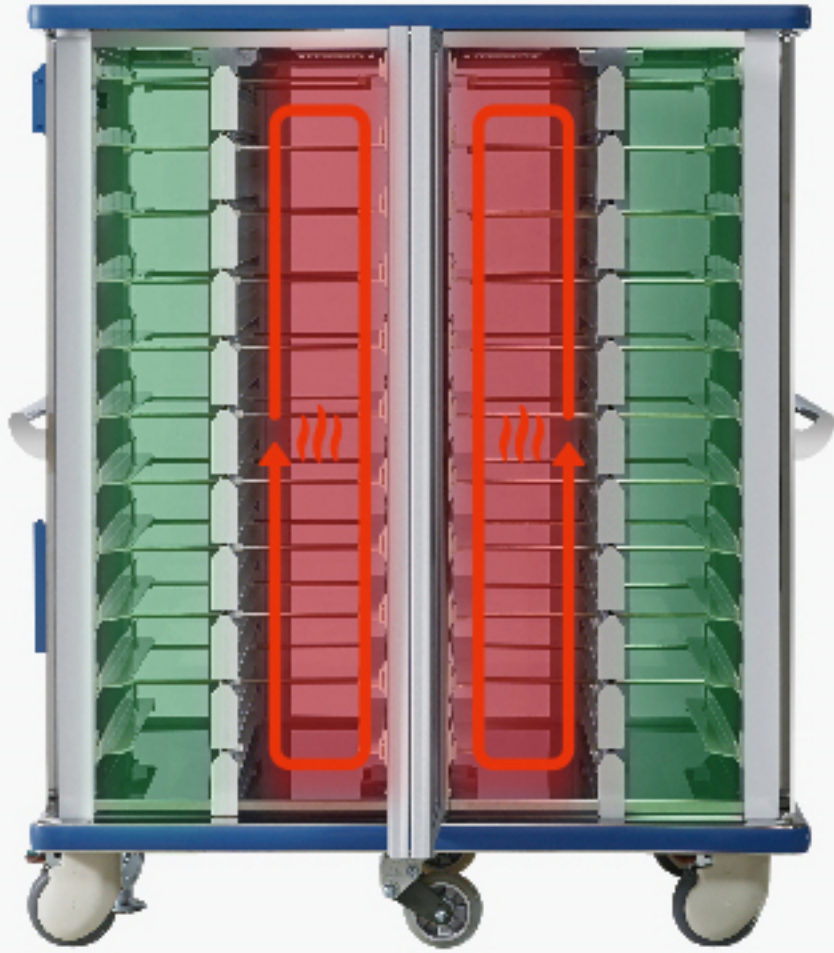

Efficient Temperature Control System

- Maintains excellent heating function by minimizing air exchange with the sealed profile structure of the heat separator
- Designed for even distribution of heat to the food in each column through a smooth heat exchange of the heated section
- Shortens waiting time during meal preparation with 30 minute pre-heating to reach 65°C

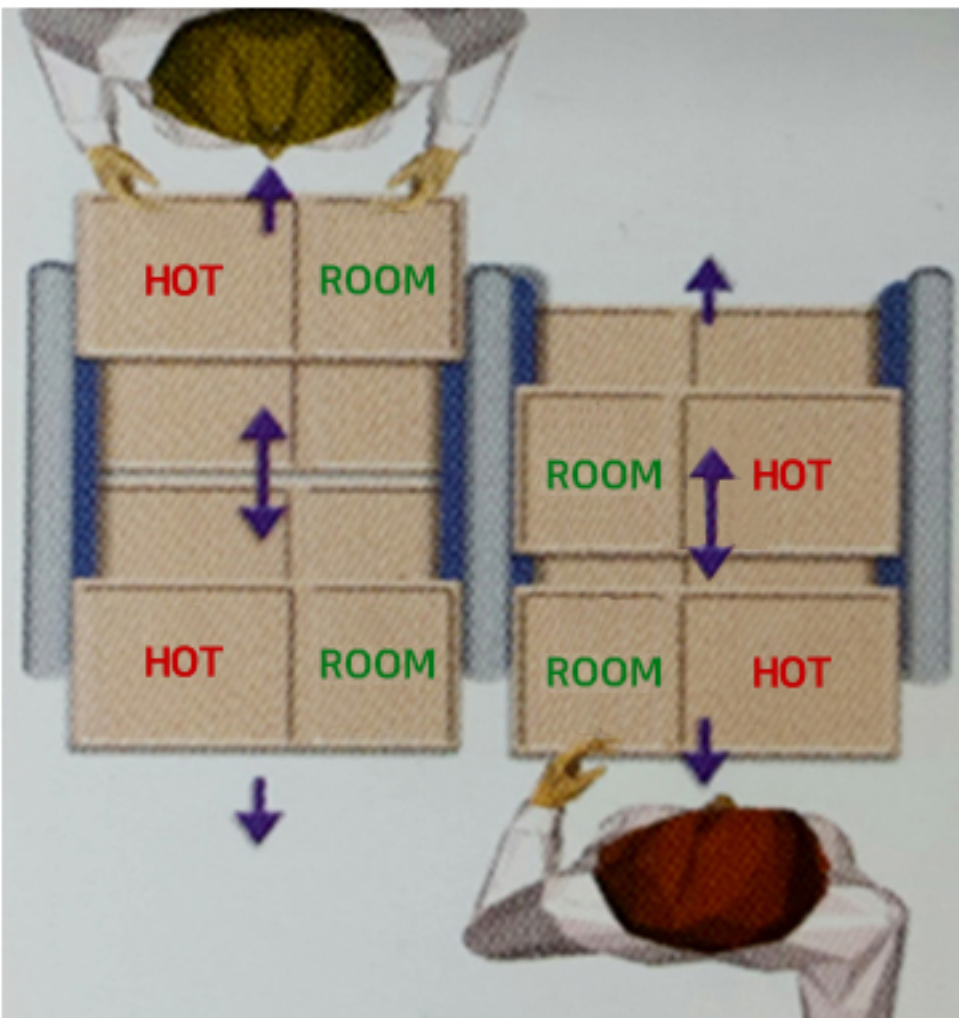

< Double-Door Pass Type >

Insulated Pair Doors / Convenient Pass-Type Separator / Safe Racks

- Maintains uniform temperature with close-fit antibacterial packing door that considers the insulation
- Convenient double-door pass type separator for increased food-service efficiency even in small spaces
- Safe racks without sharpness during preparation with sturdy and high-density material injection racks



Convenient Movement and Safety Considered

- Easy direction change and low-noise caster is optimal for the quiet hospital environment
- The caster has foreign matter preventing protection cover and foot brake function and there's additional foot brake for double safety

Power Plug / Earth Leakage Breaker

- Integrated power plug for safety maintenance and convenient repeated use
- Basic installation of earth leakage breaker to prepare for electrical safety of the product



Specifications

Model	No. of Tray	No. of Layer	Outer Dimension(mm)			Weight (Kg)	Power Consumption (kW)	Power (PWR)
			L	W	H			
ELP-900MH	40	Row 4, Column 10	1430	780	1625	205	1.8	2P AC220V 50/60Hz
	20	Row 2, Column 10	930	780	1625	130	1.8	

- Tray Size : 470 X 330mm (Tray, tableware available)